




# VERSABAR CORPORATION

## O.D. TUBING CLAMPS

### VT-1000 O.D. Series Tubing Clamps

Fits All 1-5/8" (41.3) Wide Channels

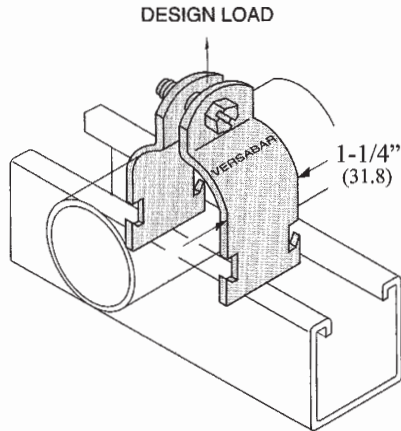

#### Stock Thickness

|                      |              |
|----------------------|--------------|
| VT-1025 thru VT-1087 | 16 ga. (1.5) |
| VT-1100 thru VT-1162 | 14 ga. (1.9) |
| VT-1175 thru VT-1350 | 12 ga. (2.6) |
| VT-1362 thru VT-1550 | 11 ga. (3.0) |
| VT-1562 thru VT-1862 | 10 ga. (3.4) |

Also Produced in: SS 304 / 316, & Copper Plated (Check with factory for availability and/or minimums).

| Part #  | O.D. Size |        | Wt / C Pr. |        | Load Rating |       |
|---------|-----------|--------|------------|--------|-------------|-------|
|         | In.       | (mm)   | Lbs.       | kg     | Lbs.        | kN    |
| VT-1025 | 1/4"      | (6.3)  | 9          | (4.1)  | 400         | (1.8) |
| VT-1037 | 3/8"      | (9.5)  | 10         | (4.5)  | 400         | (1.8) |
| VT-1050 | 1/2"      | (12.7) | 10         | (4.5)  | 400         | (1.8) |
| VT-1062 | 5/8"      | (15.8) | 11         | (5.0)  | 400         | (1.8) |
| VT-1075 | 3/4"      | (19.1) | 12         | (5.4)  | 400         | (1.8) |
| VT-1087 | 7/8"      | (22.2) | 12         | (5.4)  | 400         | (1.8) |
| VT-1100 | 1"        | (25.4) | 13         | (5.9)  | 600         | (2.7) |
| VT-1112 | 1-1/8"    | (28.5) | 13         | (5.9)  | 600         | (2.7) |
| VT-1125 | 1-1/4"    | (31.7) | 15         | (6.8)  | 600         | (2.7) |
| VT-1137 | 1-3/8"    | (34.9) | 16         | (7.3)  | 600         | (2.7) |
| VT-1150 | 1-1/2"    | (38.1) | 17         | (7.7)  | 600         | (2.7) |
| VT-1162 | 1-5/8"    | (41.3) | 19         | (8.6)  | 600         | (2.7) |
| VT-1175 | 1-3/4"    | (44.4) | 23         | (10.4) | 800         | (3.6) |
| VT-1187 | 1-7/8"    | (47.6) | 25         | (11.4) | 800         | (3.6) |
| VT-1200 | 2"        | (50.8) | 27         | (12.3) | 800         | (3.6) |
| VT-1212 | 2-1/8"    | (53.9) | 29         | (13.2) | 800         | (3.6) |
| VT-1225 | 2-1/4"    | (57.1) | 34         | (15.4) | 800         | (3.6) |
| VT-1237 | 2-3/8"    | (60.3) | 35         | (15.9) | 800         | (3.6) |
| VT-1250 | 2-1/2"    | (63.5) | 36         | (16.3) | 800         | (3.6) |
| VT-1262 | 2-5/8"    | (66.6) | 37         | (16.8) | 800         | (3.6) |
| VT-1275 | 2-3/4"    | (69.8) | 39         | (17.7) | 800         | (3.6) |
| VT-1287 | 2-7/8"    | (73)   | 40         | (18.2) | 800         | (3.6) |
| VT-1300 | 3"        | (76.2) | 42         | (19.1) | 800         | (3.6) |
| VT-1312 | 3-1/8"    | (79.3) | 43         | (19.5) | 800         | (3.6) |
| VT-1325 | 3-1/4"    | (82.5) | 45         | (20.4) | 800         | (3.6) |
| VT-1337 | 3-3/8"    | (85.7) | 46         | (20.9) | 800         | (3.6) |
| VT-1350 | 3-1/2"    | (88.9) | 48         | (21.8) | 800         | (3.6) |
| VT-1362 | 3-5/8"    | (92)   | 57         | (25.9) | 1000        | (4.5) |
| VT-1375 | 3-3/4"    | (95.2) | 57         | (25.9) | 1000        | (4.5) |
| VT-1387 | 3-7/8"    | (98.4) | 58         | (26.3) | 1000        | (4.5) |
| VT-1400 | 4"        | (102)  | 59         | (26.8) | 1000        | (4.5) |
| VT-1412 | 4-1/8"    | (105)  | 60         | (27.2) | 1000        | (4.5) |
| VT-1425 | 4-1/4"    | (108)  | 61         | (27.7) | 1000        | (4.5) |
| VT-1437 | 4-3/8"    | (111)  | 61         | (27.7) | 1000        | (4.5) |
| VT-1450 | 4-1/2"    | (114)  | 62         | (28.1) | 1000        | (4.5) |

| Part #  | O.D. Size |       | Wt / C Pr. |         | Load Rating |       |
|---------|-----------|-------|------------|---------|-------------|-------|
|         | In.       | (mm)  | Lbs.       | kg      | Lbs.        | kN    |
| VT-1462 | 4-5/8"    | (118) | 63         | (28.6)  | 1000        | (4.5) |
| VT-1475 | 4-3/4"    | (121) | 64         | (29.1)  | 1000        | (4.5) |
| VT-1487 | 4-7/8"    | (124) | 64         | (29.1)  | 1000        | (4.5) |
| VT-1500 | 5"        | (127) | 65         | (29.5)  | 1000        | (4.5) |
| VT-1512 | 5-1/8"    | (130) | 66         | (30.0)  | 1000        | (4.5) |
| VT-1525 | 5-1/4"    | (133) | 67         | (30.4)  | 1000        | (4.5) |
| VT-1537 | 5-3/8"    | (137) | 68         | (30.9)  | 1000        | (4.5) |
| VT-1550 | 5-1/2"    | (140) | 68         | (30.9)  | 1000        | (4.5) |
| VT-1562 | 5-5/8"    | (143) | 129        | (58.6)  | 1000        | (4.5) |
| VT-1575 | 5-3/4"    | (146) | 131        | (59.5)  | 1000        | (4.5) |
| VT-1587 | 5-7/8"    | (149) | 133        | (60.4)  | 1000        | (4.5) |
| VT-1600 | 6"        | (152) | 135        | (61.3)  | 1000        | (4.5) |
| VT-1612 | 6-1/8"    | (156) | 137        | (62.2)  | 1000        | (4.5) |
| VT-1625 | 6-1/4"    | (159) | 140        | (63.6)  | 1000        | (4.5) |
| VT-1637 | 6-3/8"    | (162) | 141        | (64.0)  | 1000        | (4.5) |
| VT-1650 | 6-1/2"    | (165) | 144        | (65.4)  | 1000        | (4.5) |
| VT-1662 | 6-5/8"    | (168) | 146        | (66.3)  | 1000        | (4.5) |
| VT-1675 | 6-3/4"    | (172) | 148        | (67.2)  | 1000        | (4.5) |
| VT-1687 | 6-7/8"    | (175) | 150        | (68.1)  | 1000        | (4.5) |
| VT-1700 | 7"        | (178) | 152        | (69.0)  | 1000        | (4.5) |
| VT-1712 | 7-1/8"    | (181) | 153        | (69.5)  | 1000        | (4.5) |
| VT-1725 | 7-1/4"    | (184) | 244        | (110.8) | 1000        | (4.5) |
| VT-1737 | 7-3/8"    | (187) | 246        | (111.7) | 1000        | (4.5) |
| VT-1750 | 7-1/2"    | (191) | 250        | (113.5) | 1000        | (4.5) |
| VT-1762 | 7-5/8"    | (194) | 253        | (114.9) | 1000        | (4.5) |
| VT-1775 | 7-3/4"    | (197) | 256        | (116.2) | 1000        | (4.5) |
| VT-1787 | 7-7/8"    | (200) | 259        | (117.6) | 1000        | (4.5) |
| VT-1800 | 8"        | (203) | 262        | (118.9) | 1000        | (4.5) |
| VT-1812 | 8-1/8"    | (206) | 265        | (120.3) | 1000        | (4.5) |
| VT-1825 | 8-1/4"    | (210) | 269        | (122.1) | 1000        | (4.5) |
| VT-1837 | 8-3/8"    | (213) | 272        | (123.5) | 1000        | (4.5) |
| VT-1850 | 8-1/2"    | (216) | 275        | (124.9) | 1000        | (4.5) |
| VT-1862 | 8-5/8"    | (219) | 279        | (126.7) | 1000        | (4.5) |

Check with factory for availability and/or minimums on sizes above 2-5/8" O.D. (66.7)